

# Primer Gres




One component, silane based, primer, colourless, to ensure adherence on non-porous substrates.



## Fields of Application:

- as primer on non-porous surfaces
- as primer on porcelain stoneware
- as primer on glass
- as primer on non-porous, stable natural stones and marble

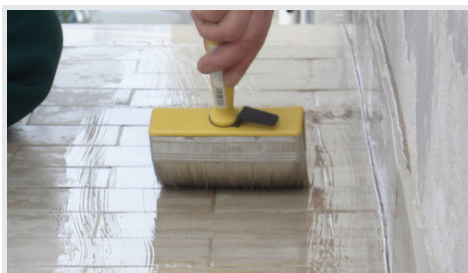

**Primer Gres** is a primer that avoids the damp rising from the ground which could compromise the sealing of a polyurethane waterproofing agent.

Its main function is to guarantee a strong adhesion on poorly absorbent substrates, and it is mandatory to use it in systems with **Scudolastic T**. Its new formula guarantees complete distribution over the entire substrate.



Clean the surface to be treated thoroughly by removing oil, grease and contaminating soaps. Remove the surface salts of the cement, the non-adhered particulates, the chemical agents released from the molds, the cement evaporation retarding membranes and fill the surface irregularities with the suitable smoothing plaster of the Opera range.

Apply the **Primer Gres** with a clean cloth, avoiding puddles and drops (apply it as if you were cleaning the surface to be treated). As soon as **Primer Gres** has dried up (15-20 min), apply **Scudolastic T** with a roller or brush..

Characteristics	Application Methods	Consumption
One-component Easy application Total adhesion to support Rapid-setting Does not stain Ready to use	Brush Roller Damp cloth	30-70 gr/m <sup>2</sup> in one layer
		<b>Storage</b>
		Shelf life of 12 months in the original packaging and in a dry place. Frost and heat sensitive.

**Code**  
406073  
406081

**Product**  
Primer Gres  
Primer Gres

**Color**  
Transparent  
Transparent

**Packages**  
1 kg  
5 kg

**Pallet**  
350 kg  
600 kg